FOUNDATION PLAN SCALE 1/4"=1'-0"

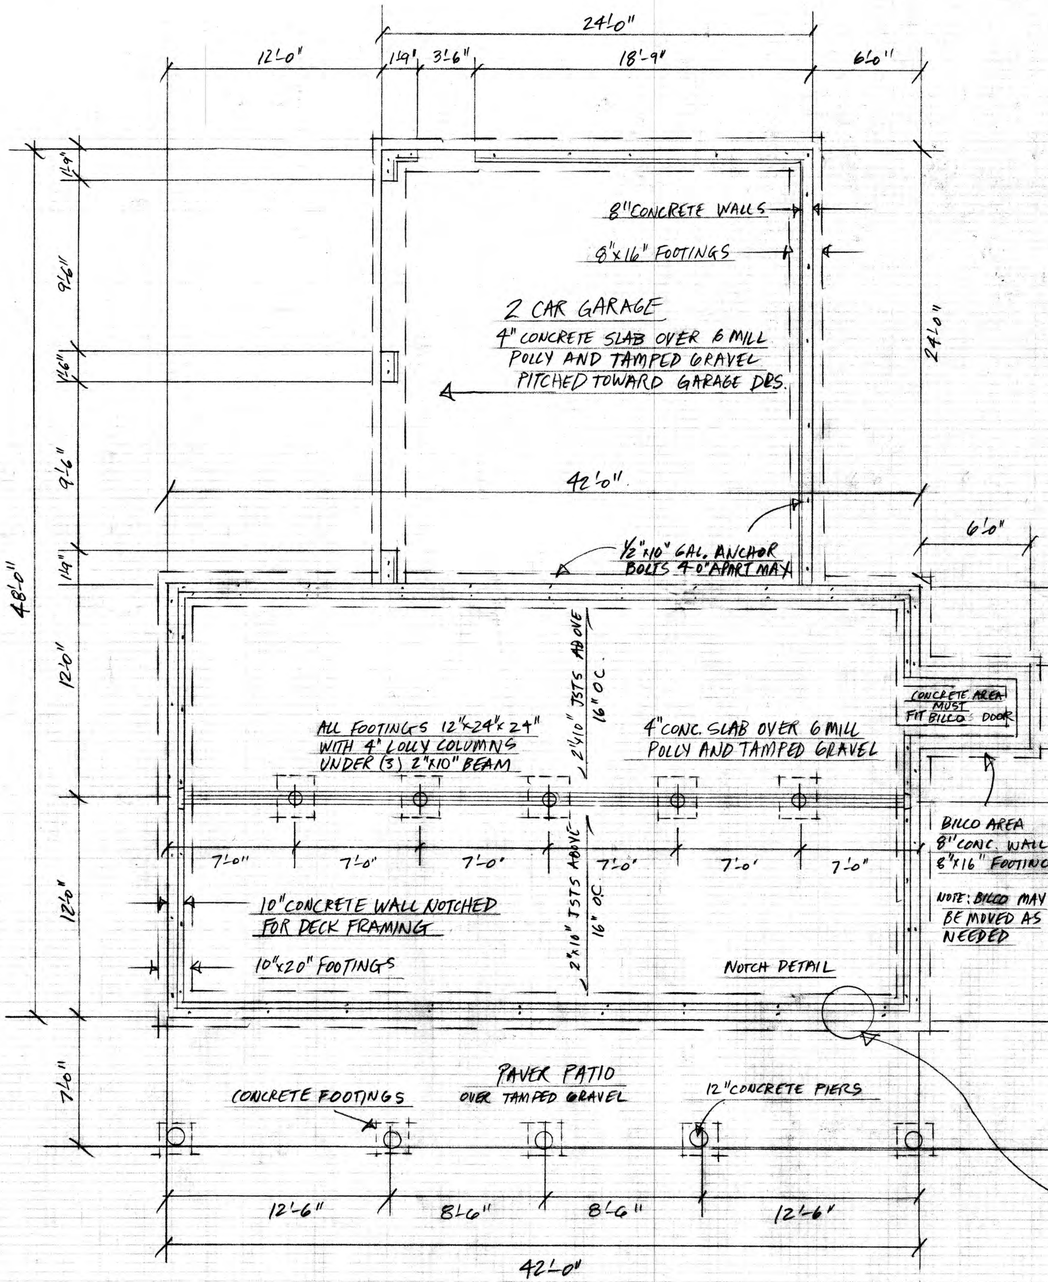

DECK FRAMING DETAIL SCALE 1/4"=1'-0"

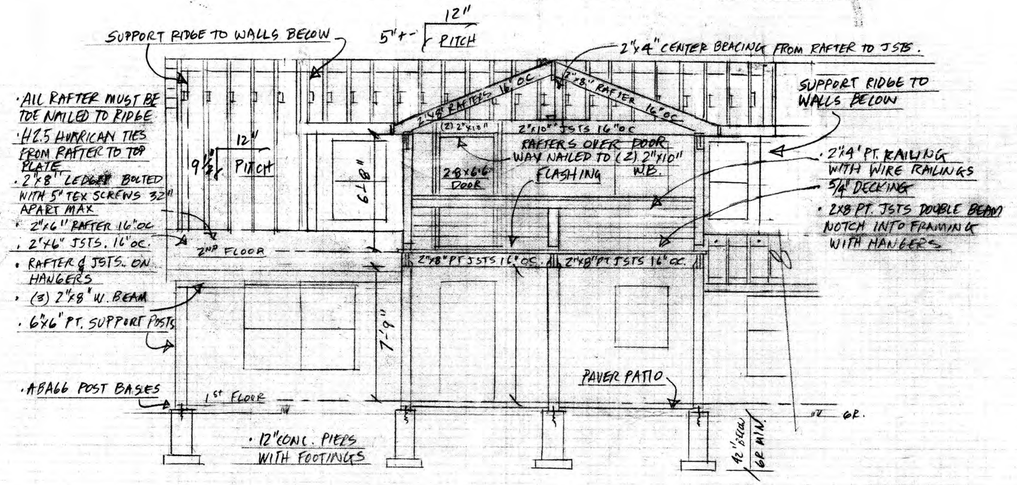

HOUSE CROSS SECTION SCALE 1/4"=1'-0"

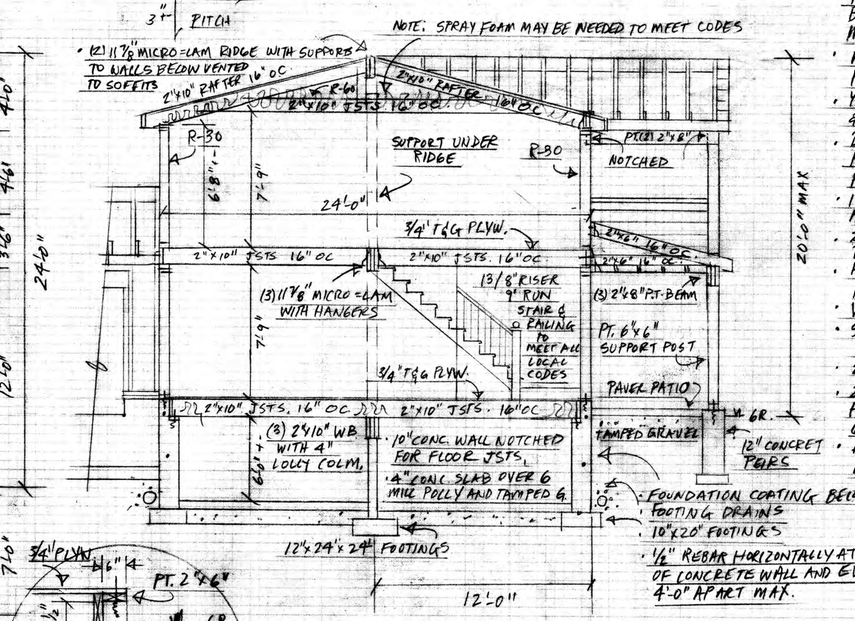

NOTCH DETAIL NO SCALE



GENERAL NOTES:

- GENERAL NOTES APPLY TO ALL SECTION DETAILS
- ALL ENGINEERED LUMBER MUST BE REVIEWED & CERTIFIED BY MANUFACTURER
- ASPHALT ROOFING OVER ROOF PAPER
- 1/2" CDX PLYWOOD OVER RAFTERS & OUTSIDE WALLS
- 2-BY BLOCKING ON ALL ROOF PERIMETERS 4'-0" IN ON PLYWOOD SEAM
- ICE & WATER ON ALL EAVES AND VALLEYS
- 2"x6" NAILED ACROSS RAFTER TAILS
- H2.5 HURRICANE TIES FROM RAFTER TO TOP PLATE
- VINYL SIDING OVER HOUSE WRAP
- SHEAR WALL CONST. (CHECK FLOOR PLAN)
- 2"x6" STUD 16" OC.
- 2"x6" PT. PLATE ON CONCRETE FOUNDATION BOLTED WITH 1/2"x10" GAL. ANCHORS
- ALL RAFTERS MY BE TOE NAILED TO RIDGE

3.3

- FOUNDATION PLAN
- DECK FRAMING DETAIL
- HOUSE CROSS SECTION
- NOTCH DETAIL

BUILDER

OWNER